



BARRICADE
FLASH ULTI



A SUPERIOR BUTYL FLASHING SYSTEM


Barricade® Flash Ulti™ offers outstanding moisture protection and provides the ultimate line of defense around windows and doors. When installed according to specifications shown in the flashing system installation guide, Barricade Flash Ulti provides a superior weatherproof seal for all window, door, and skylight installations.

BENEFITS

- Provides a permanent, weatherproof seal
- Protects from the sun's harsh rays for up to 365 days
- Easy to handle and apply — unique self-adhesive strip eliminates fastening with nails or staples
- Kraft paper release liner provides simple peel-and-stick installation
- House wraps and building papers integrate easily
- Free of asphalts, VOCs, and solvents
- Backed by a 10-year limited warranty
- Application temperature range of 0°F – 150°F




CROSS SECTION OF A WALL

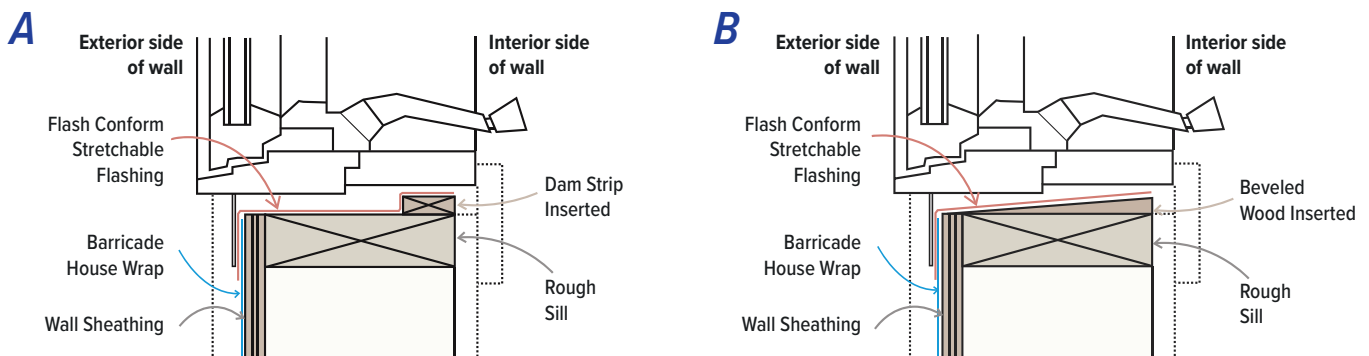



INCORPORATE FLASHING AS PART OF AN OVERALL DRAINAGE PLANE TO CONTROL THE DIRECTIONAL FLOW OF WATER AND MOISTURE.

Studies show that inadequate design and construction of flashings are responsible for a high percentage of window and door leaks. Poor design detail is one of the most common causes of building envelope defects and builder callbacks. When installed properly, the Barricade Flash system can intercept and direct the flow of water to designed drainage paths to prevent water from penetrating the building. Both Barricade Flash Conform and Barricade Flash Ulti have self-sealing properties that can stop leaks around fasteners that may later be driven through the adhesive.

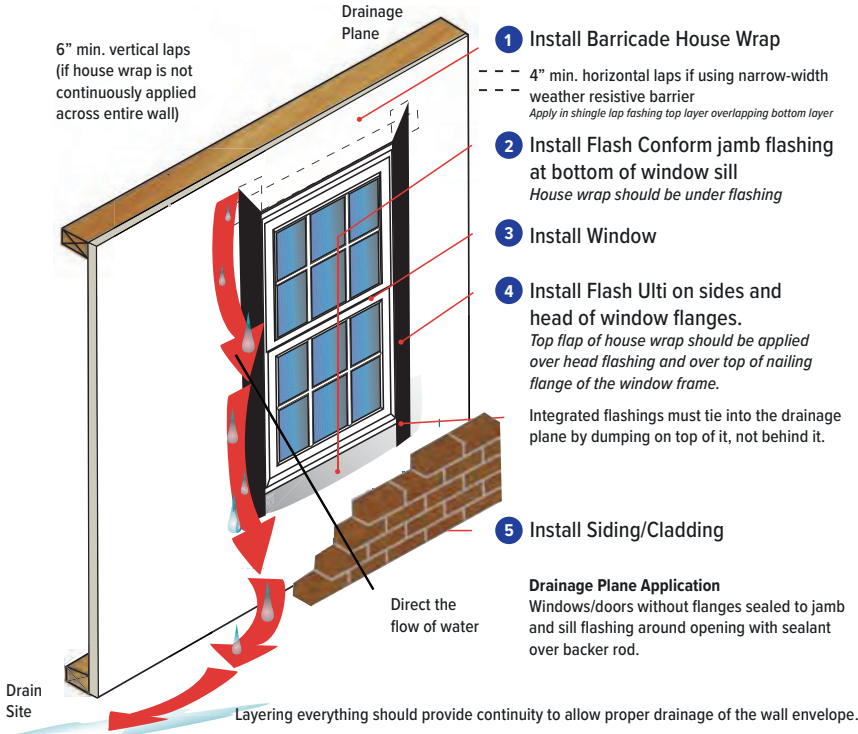

SPECIFICATIONS *Test Method D3330 F*

Composition	Applicable Standards	Roll Length	Standard Roll Widths	Overall Thickness	Application Temp. Range	Tensile Strength	Water Vapor Transmission Rate	Warranty
Polyolefin faced, peel-and-stick flashing tape using butyl rubber adhesive	AAMA 711 Compliant	75'	4" 6" 9"	20 mils	0°F-150°F	60 lbs.in	< 0.2 g/100in ² /24hrs	10-Year System Warranty

Note: The information contained in this data sheet is, to the best of our knowledge, true and accurate and is presented in good faith. Barricade Building Products assumes no liability, expressed or implied, as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents. Contact Barricade Building Products for further information or technical support.



Find more information at:
barricadebp.com/flash-ulti
 1-877-832-0333