

## WHY CHOOSE BARRICADE® UDL PRO™

Barricade® UDL Pro™ (formerly Roof Pro) is suitable for all roof coverings and offers a 20-year limited warranty, backed by high-performance features that benefit both builders and homeowners.

### BENEFITS

#### Non-skid coating

Barricade UDL Pro has a non-skid coating on the back for safe installation.

#### More coverage

14% more coverage per lap (48-inch width compared to 42-inch synthetics)  
33% more coverage per lap (48-inch width compared to 36-inch felt)

#### Ease of installation

Lies flat and doesn't wrinkle.

#### Faster Installation

48-inch width means faster installation and savings on labor costs.

#### UV resistance

Barricade's special ultraviolet stabilizers protect it from the sun's harsh rays for up to 180 days.

#### Water resistance

Protection against water elements, ensuring a strong, protective, and reliable installation.


#### Code Compliant

- ASTM D226 I & II, ASTM D4869 II & IV
- Florida #16453-R5



#### Coverage

Approximately 916 sq. ft. per roll or less, depending upon overlap and roof design



#### Cool gray surface

Barricade UDL Pro's cool gray surface is up to 30° cooler than black underlayment.




#### Superior wind and tear resistance

Heavy winds pose a threat to roof underlayment during installation. With its tear-resistant design, Barricade UDL Pro is a superior durable underlayment.



#### UV resistance

Barricade UDL Pro is protected against UV rays for up to 6 months.

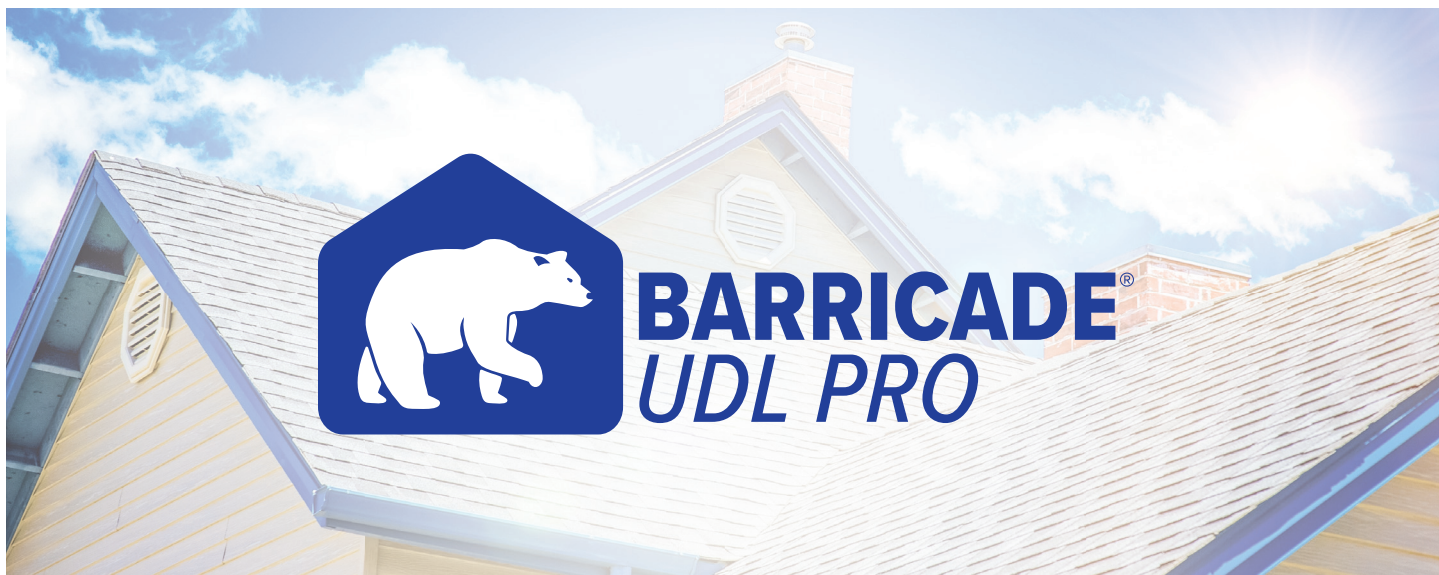

## BARRICADE® UDL PRO™ OUTPERFORMS THE COMPETITION

Barricade UDL Pro is suitable for all roof coverings. Available in 5 or 10 square rolls, Barricade UDL Pro provides superior tear resistance and superior strength compared to felt.

### Preparation

The deck surface must be dry and free of dust, dirt, loose nails, debris, and other protrusions. Damaged sheathing must be replaced. Ensure that the space beneath the roof sheathing is properly ventilated before installing to avoid condensation problems.

### Installation

UDL Pro is laid out horizontally (parallel) to the eave, with the printed side up, using 4" horizontal laps and 6" vertical laps. Follow codes for low slopes as defined as 2:12 to 4:12 and steep slopes greater than 4:12 applications. UDL Pro is designed to withstand 180 days of exposure prior to being covered with the final roofing material. Barricade® recommends covering UDL Pro with the final roofing material as soon as possible.

### Fasteners

Barricade® recommends attaching UDL Pro to structural roof deck material using plastic cap, ring shanked roofing nails that have a minimum 1" diameter cap. Anchoring to be installed at a minimum per surface markings, spaced 6" on-center in vertical and horizontal laps, and 12" on-center along the center of the roll. If the application of UDL Pro and the final roofing material occur on the same day, then the option to use every other printed anchoring placement is acceptable. For same day coverage, corrosion resistant 3/8" head and 1" leg roofing nails are acceptable as well as 1" plastic cap staples. High slope roofs, (> 7/12 pitch) must use plastic cap nails. All anchoring devices must be flush, 90° to the roof deck, and tight with the underlayment surface and the structural roof deck.

### CAUTION - READ GOOD SAFETY PRACTICES BELOW

As with any roofing product, always follow safe roofing codes and practices (OSHA), and always use fall-protection devices when working on roofs (i.e. toe boards, rope harnesses, and rubber or synthetic soft-sole footwear). Use caution when walking or standing on Barricade UDL Pro as wet and/or dusty conditions may reduce traction. Failure to use proper safety gear and footwear can result in serious injury.

## SPECIFICATIONS

Meets Standards	Standard Sizes	Total Weight	Water Transmission ASTM D4869	Water Vapor Transmission ASTM E96	Tensile Strength ASTM D828	Nominal Thickness ASTM D1777	UV Exposure Rating	Warranty
ASTM D226 I & II ASTM 4869 II & IV FL #16453-R5	48" x 125' 48" x 250'	12 lbs/roll 23 lbs/roll	Pass	0.07 US Perms	75 lbs/in. MD 40 lbs/in. CD	8 mils	6 months	20-Year Limited Warranty

\*The information contained in this data sheet is, to the best of our knowledge, true and accurate and is presented in good faith. Barricade Building Products assumes no liability, expressed or implied, as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents. Contact Barricade Building Products for further information or technical support.



**BARRICADE®**  
BUILDING PRODUCTS

Find more information at:  
barricadebp.com/udl-pro  
1-877-832-0333